



GUTMANN

## *Quick guide*

Configuration of fixedlength  
metal window sills part two


[gutmann.de](http://gutmann.de) | [tuulo.de](http://tuulo.de)

## ***Inhalt***


Retrieve product field .....	3
Select required window sill system.....	4
Window sill configurator default settings.....	4
Select configurator.....	5
Part 2. Fast entry of segmented window sills .....	6-10

# Retrieve product field

## Option 1: via Products

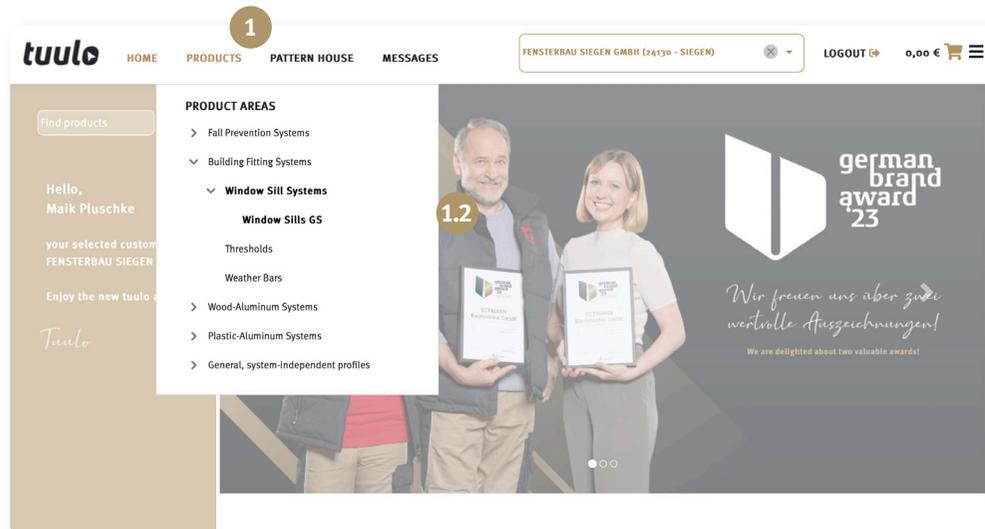

## Option 2: via Show House

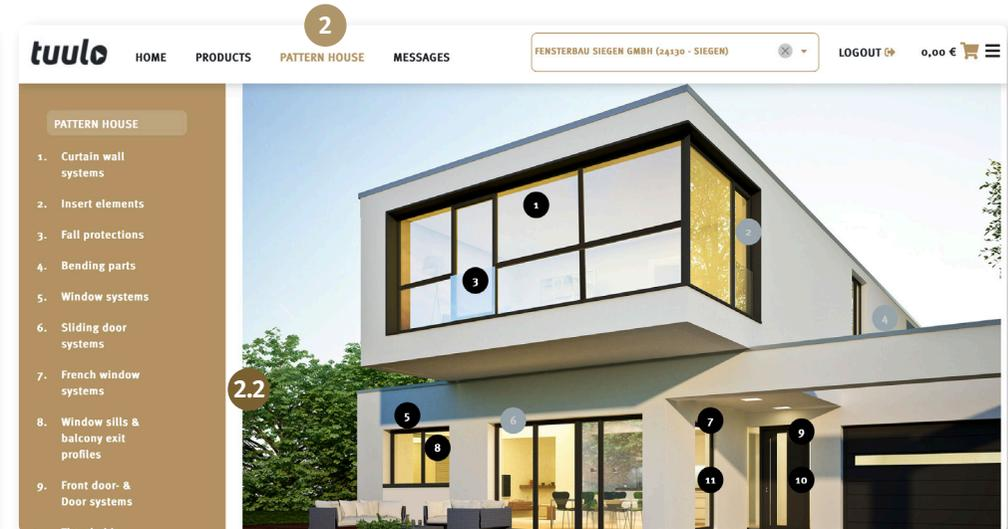


# Select required window sill system

Select “GS40” or “GS25” and click on “Start configurator” **1**.


Select “Outreach” **2**.  
Chose between In-stock colours and Special Coating to specify “Colour” **3**.

All possible parameters/ filters can be set.  
After selecting desired colour, click on “Apply selection” **4**.

System can be changed again if required.

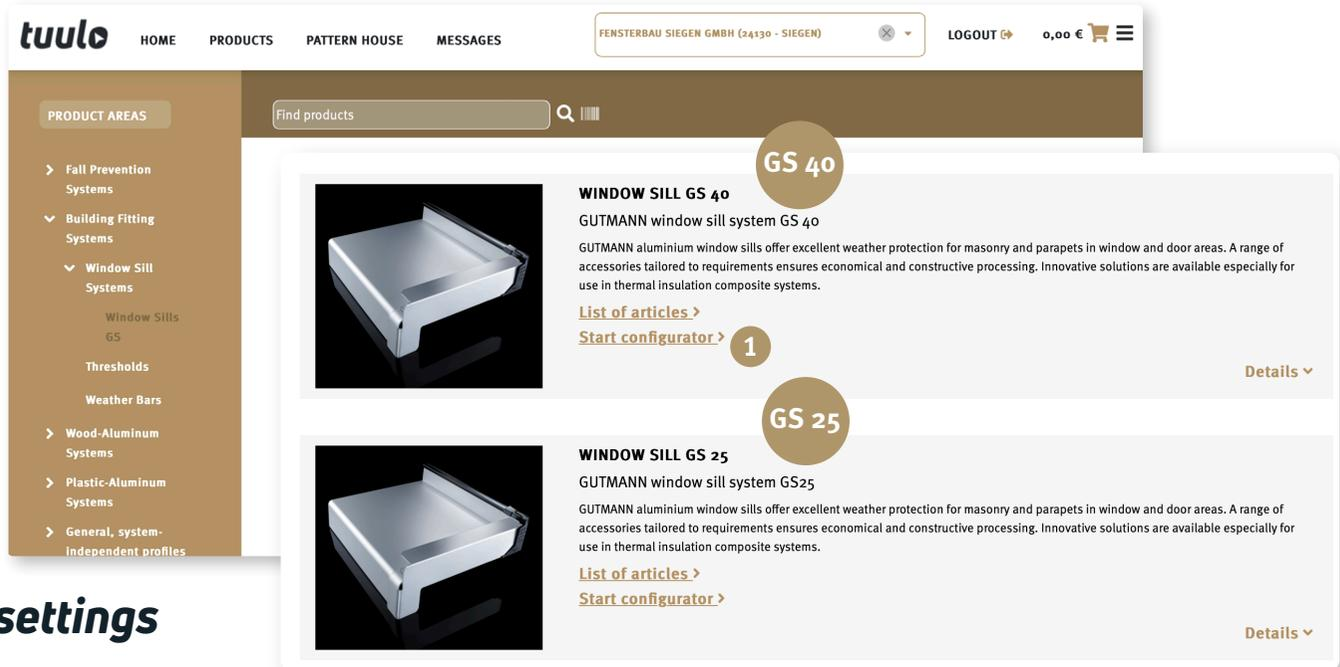

# Window sill configurator default settings

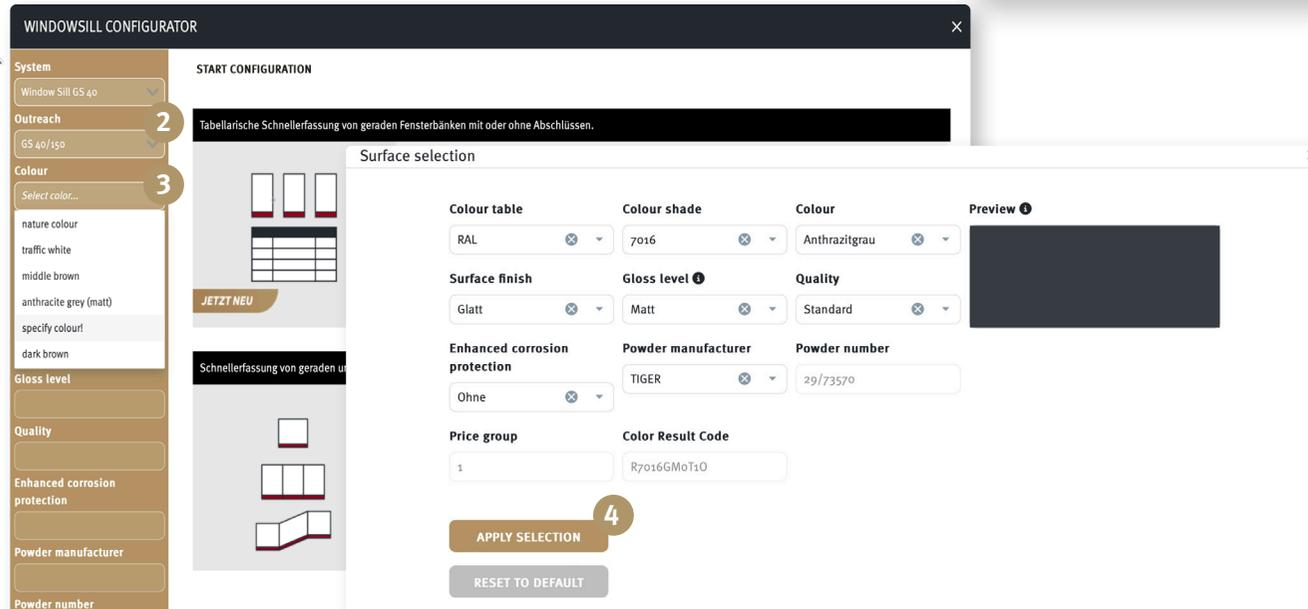

# Select configurator

## 1. Option:

For multiple identical window sills indifferent lengths.

Tabellarische Schnellerfassung von geraden Fensterbänken mit oder ohne Abschlüssen.




- inkl. erweitertes Zubehör wie: Antidröhn, Fensterbankhalter, etc.

**JETZT NEU**

## 2. Option:

Especially for segmented window sills or for inside and outside corners.

Schnellerfassung von geraden und segmentierten Fensterbänken mit erweitertem Funktionsumfang.



- bis zu 6 Teillängen erfassbar, inkl. Stoßverbindern oder Unterlegen
- Innen- und Außenecken mit 90° und 135° Winkeln erfassbar, inkl. erforderlicher Eckverbindungen
- inkl. erweitertes Zubehör wie Antidröhn, Fensterbankhalter, etc.

## Option 2: Quick entry of segmented window sills


Start Configurator.

Enter **1** “Quantity“ of required window sills.

An optional **2** “Piece description“ can be added.

Click on **3** “Continue“.

Schnellerfassung von geraden und segmentierten Fensterbänken mit erweitertem Funktionsumfang.



- bis zu 6 Teillängen erfassbar, inkl. Stoßverbindern oder Unterlegen
- Innen- und Außenecken mit 90° und 135° Winkeln erfassbar, inkl. erforderlicher Eckverbindungen
- inkl. erweitertes Zubehör wie Antidröhn, Fensterbankhalter, etc.

START CONFIGURATOR

WINDOWSILL CONFIGURATOR

System  
Window Sill GS 40

Outreach  
GS 40/150

Colour  
anthracite grey (matt)

Colour table

Colour shade

Surface finish

Gloss level

Quality


Enhanced corrosion protection

Powder manufacturer

Position

Quantity **1** Piece Designation **2**

Continue **3**

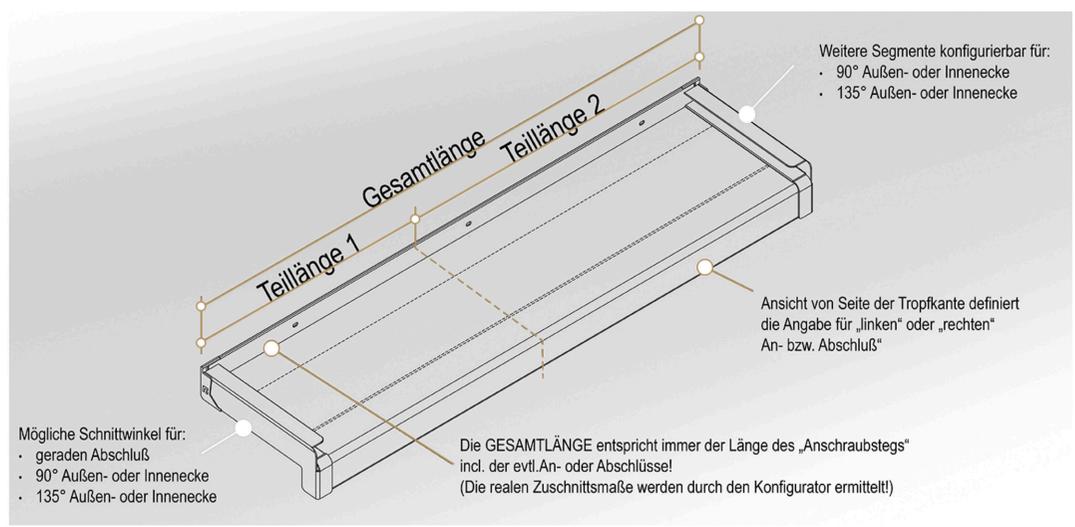

Weitere Segmente konfigurierbar für:

- 90° Außen- oder Innenecke
- 135° Außen- oder Innenecke

Ansicht von Seite der Tropfkante definiert die Angabe für „linken“ oder „rechten“ An- bzw. Abschluß

Mögliche Schnittwinkel für:

- geraden Abschluß
- 90° Außen- oder Innenecke
- 135° Außen- oder Innenecke

Die GESAMTLÄNGE entspricht immer der Länge des „Anschraubstegs“ incl. der evtl. An- oder Abschlüsse!  
(Die realen Zuschnittsmaße werden durch den Configurator ermittelt!)

Enter required **1** “Total length”.

**2** “Partial length” can be changed.

Click on **3** “Continue”.

The screenshot shows the 'WINDOWSILL CONFIGURATOR' interface. On the left is a sidebar with various configuration categories: System (Window Sill GS 40), Outreach (GS 40/150), Colour (anthracite grey (matt)), Colour table, Colour shade, Surface finish, Gloss level, Quality, Enhanced corrosion protection, and Powder manufacturer. The main area is titled 'Position' and includes 'Quantity' (1) and 'Piece Designation' (Dachgeschoss). Below this is 'Segment 1' with 'Basic parameters' showing 'Total length' (3506 mm, marked with a circled 1), 'Partial lengths' (2), and a 'Change chain' button. To the right, 'S1-T1' and 'S1-T2' are both set to 1753 mm (marked with a circled 2). At the bottom right, there is a 'Continue' button (marked with a circled 3) and a 'Finish segment' button. A 3D diagram of a window sill segment is shown in the center, with a red section highlighted.



Total length is always the length of the screw side bar including any connectors or closures!  
If no connectors or closures are entered, the total length is the actual cutting length!

## Option 2: Quick entry of segmented window sills

Click on 1 “Connection between partial lengths“.

Select 2 “Cutting angle left/right“.

Click on 3 “Select connection“.

The screenshot displays the 'WINDOWSILL CONFIGURATOR' interface. On the left is a vertical sidebar with various configuration categories: 'GS 40/150', 'Colour' (set to 'anthracite grey (matt)'), 'Colour table', 'Colour shade', 'Surface finish', 'Gloss level', 'Quality', 'Enhanced corrosion protection', 'Powder manufacturer', and 'Powder number'. The main area is titled 'Segment 1' and contains the following settings:

- Basic parameters:** Total length is 3506 mm. Partial lengths are 1753 mm (S1-T1) and 1753 mm (S1-T2). A 'Change chain' button is present.
- Connection between partial lengths:** Three options are shown: 'Longitudinal', 'Underlay', and 'Without'. The 'Without' option is selected and highlighted with a circled '1'.
- Cutting angle LEFT:** The 'Angle' dropdown is set to 'Straight 90° Left', highlighted with a circled '2'.
- Select connection:** A red button labeled 'Select connection' is highlighted with a circled '3'.

On the right side of the main area, there is a 3D perspective diagram of a window sill segment with a brown finish, showing its connection to other segments. A 'Finish segment' button is located at the bottom right of the interface.

## WINDOWSILL CONFIGURATOR

GS 40/150

### Colour

anthracite grey (matt)

### Colour table

### Colour shade

### Surface finish

### Gloss level

### Quality

### Enhanced corrosion protection

### Powder manufacturer

## Further accessories or service

1



Mounting bracket

Without  
 Yes



Drainage


Without  
 Yes

2



Sound insulation

Without  
 Yes




Sill gasket

Without  
 Yes

### STANDARD


Article packed separately by type

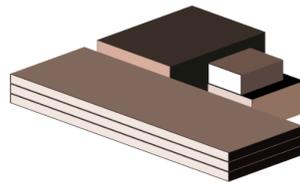

Surcharge (Per piece) + 0,00 €

### STANDARD PLUS


Item packed separately according to type, incl. noise insulation glued on

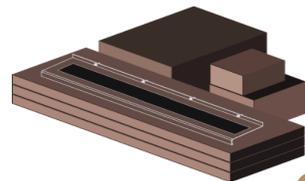

Surcharge (Per piece) + 0,40 €

### PREMIUM

Article packed in positions Accessories as far as technically feasible - pre-assembled

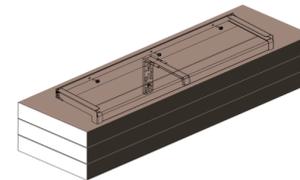




Surcharge (Per piece) + 16,80 €

Select appropriate accessories by clicking **1** “Yes”.

**2** If the “Yes” option is selected for Sound isolation, packaging type “Standard Plus” can be selected and can **only be selected** when sound isolation has been ordered.

Sound isolation is then applied to the window sills with adhesive.

Select **3** “Packaging type”, default setting is Standard.

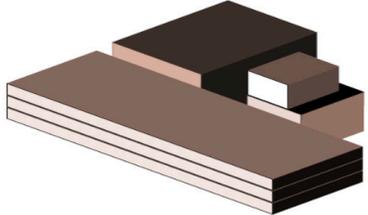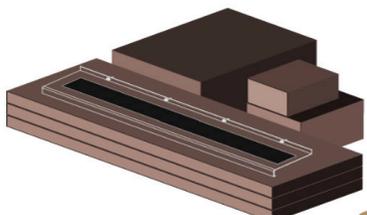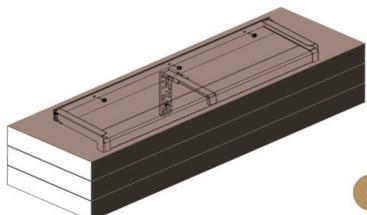STANDARD	STANDARD PLUS	PREMIUM	
<p>Article packed separately by type</p>  <p><i>i</i></p>	<p>Item packed separately according to type, incl. noise insulation glued on</p>  <p><i>i</i></p>	<p>Article packed in positions Accessories as far as technically feasible - pre-assembled</p>  <p><i>i</i></p>	
<p>Surcharge (Per piece) + 0,00 €</p>	<p>Surcharge (Per piece) + 0,40 €</p>	<p>Surcharge (Per piece) + 16,80 €</p>	
<p>1 Edit segment configuration</p>	<p>2 Add another position by copy and edit mechanism</p>	<p>3 Close configuration &amp; go to basket</p>	<p>4 Parts list</p>

If you need to change something, you can return to the segment here **1** “Edit”.

Metal window sills complete. Do you need additional metal window sills of the same kind? **2** “Add another position”.

Is everything entered/selected correctly and the order complete? **3** “Close configuration & go to basket”.

Display **3** “Parts list”.

***If you would like to know how the fast entry of straight and segmented window sills with extended functionality works, take a look at the brochure Fast entry of straight and segmented window sills.***





GUTMANN Bausysteme GmbH  
Nürnberger Straße 57  
D - 91781 Weißenburg  
T +49 (9141) 995 11 36  
F +49 (9141) 995 11 37

[info@gutmann.de](mailto:info@gutmann.de)  
[www.gutmann-bausysteme.de](http://www.gutmann-bausysteme.de)

[tuulo@gutmann.de](mailto:tuulo@gutmann.de)  
[www.tuulo.de](http://www.tuulo.de)